



V7 P Series


for video wall

Features

- High-end Multi-touch experience (truly support 2/4/6/10/12/16/32/40 simultaneous touch points)
- Strong ambient light immunity up to 150,000lux
- Fast response
- Support remote control and remote diagnosis
- Easy Integration
- Support Multi-Display

Application

- Interactive Video Wall
- Multi-Touch Video Wall
- Entertainment
- Command Center and Boardroom
- Interactive LED wall

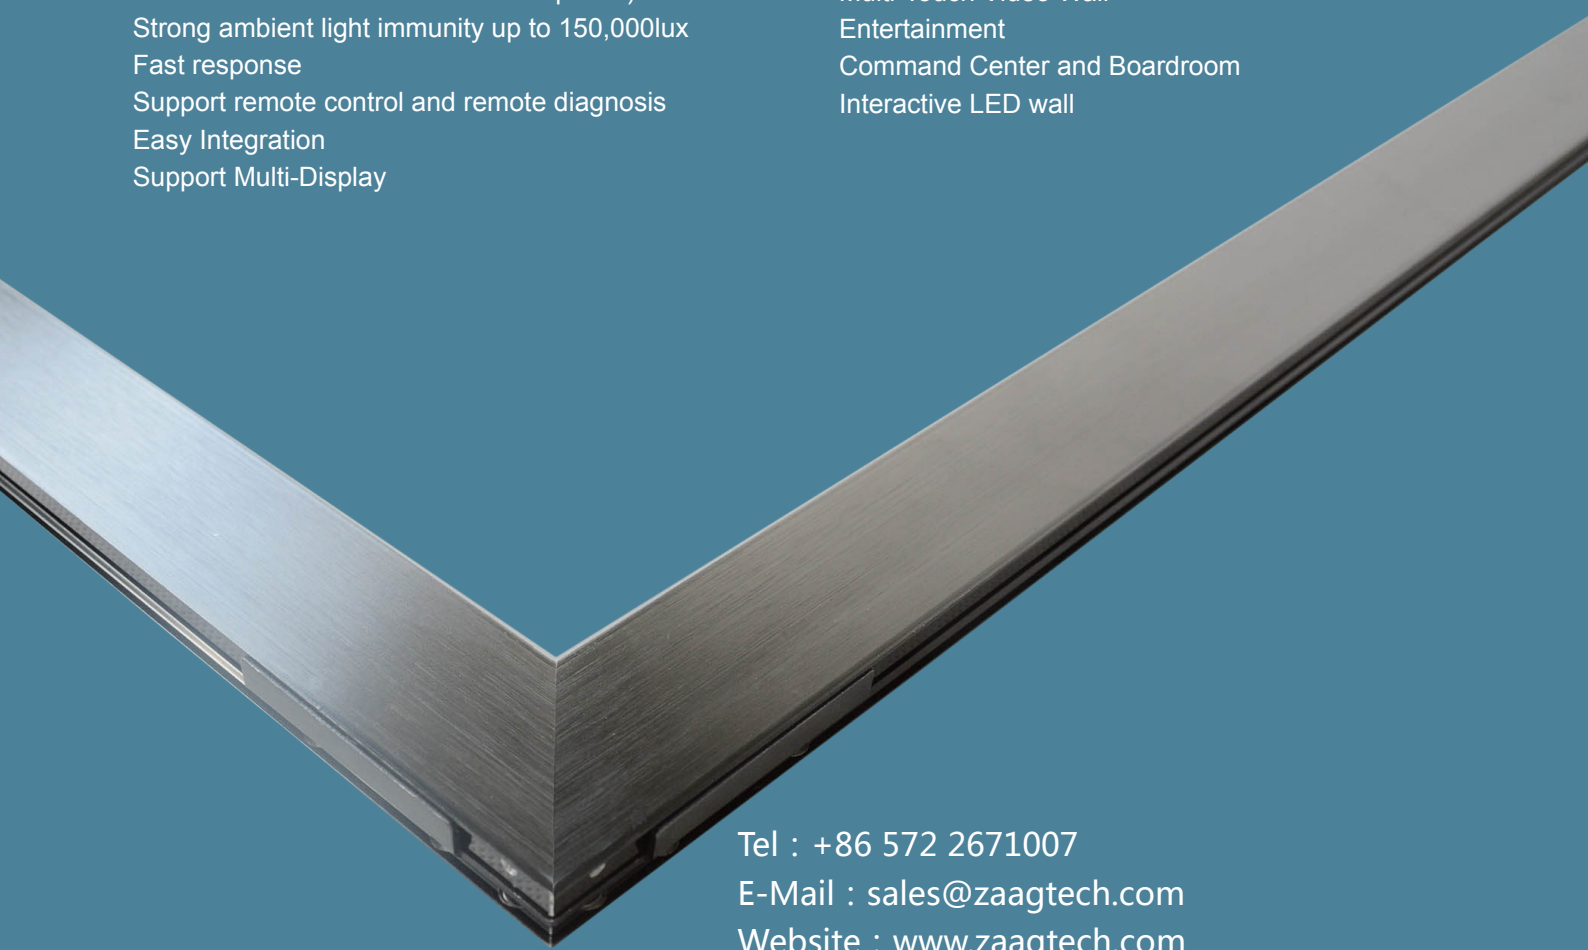

Tel : +86 572 2671007

E-Mail : sales@zaagtech.com

Website : www.zaagtech.com

Add : 1573 Hongfeng Road, Huzhou, Zhejiang, China


Touch Panel

Standard Size	>84" Customized upon special requests
Dimension	37.5mm width, 11.7mm thickness (with frame, without glass)
Number of Touch Points	2, 4, 6, 10, 12, 16, 32, 40
Minimum Touch Object	5mm
Touch Activation Force	No minimum touch pressure required
Touch Durability	Unlimited
Resolution	32768*32768
Linearity Deviation	±1mm
Fault Tolerance	Workable even 75% sensors are damaged
Frames per Second	Up to 200 fps
Typical Response Time	3-10ms
Light Transmission	100% without glass
Operating Systems	Windows®7, Windows®8, Windows®10, Vista, XP, Mac® OS, Linux, Android
Protocols	HID, TUIO, Flash
Software	ZaagTech zinFrame Server
Re-development	Provide free SDK, support C/C++, C#, Java etc.
Warranty**	1 year limited warranty on parts and labor

Electrical

Power Supply	USB Connection
Low Power Consumption	5V max, 0.5~3A
ESD	Per EN61000-4-21995; Level 4. Contact Discharge 8kV, Air Discharge 15kV 15kV on USB Connector pins

Environment

Temperature	Operating Temperature: -20°C~70°C Storage Temperature: -40°C~85°C
Humidity	Operating Humidity: 10%~90%RH(Non-condensing) Storage Humidity: 10%~90%RH
Certification	

Warranty** for P series multi-touch overlay excludes coverage for damage resulting from accident, liquid damage, disassembly, unauthorized service and unauthorized modifications.